



Motorized Aluminum Shutters

Protection & Security



MaestroShield®
Protection Like No Other

Aluminum Shutters



Extrusion Options


Hood Style(45°)

Angled (45degree)



Side Track Options(s)


- ◆ End Retention
- ◆ Non-End Retention



Locking Bottom Bar

Slat Style(s)

- ◆ Solid
- ◆ Vented


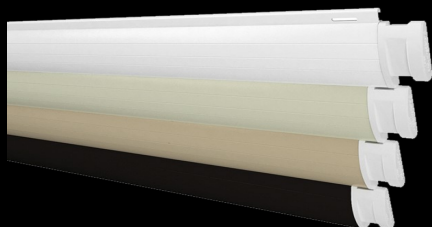


Colors

White, Ivory, Beige, Bronze




Custom colors available upon request

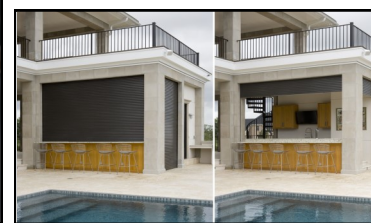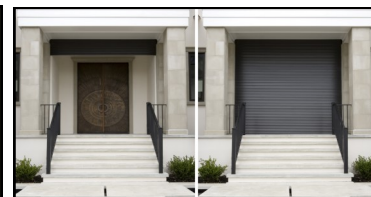

Roll Down Shutters

Engineered to be the very best, MaestroShield End Retention Roll Down Shutters are designed for strength and beauty. Our strength has been rigorously tested/certified, and span industry leading lengths up to 262" and heights of up to 350".



Our beauty is in the versatility of our system which offers the choice of venting slats in multiple colors, as well as a wide array of motors and electronics that will seamlessly integrate your system providing comfort, convenience, and unparalleled protection against storms and intruders.

Features:

MaestroShield offers the only impact-rated hood assembly in today's market. End Retention and Non-End Retention Systems provide an additional level of protection and security against intrusions, as well as high wind speeds, wind-born debris and ultra-violet solar radiation.

Recommended for doors, windows, porches, lanai's, balconies, portico's and store fronts with available standard sizes up to 262" wide and 360" tall.



Aluminum Roll Down Shutter Security & Hurricane Protection

Both MaestroShield® end retention and non-end retention shutters have approval from, Florida Building Code. With some of the highest design pressure ratings in the industry, a 21-foot width end retention shutter can withstand sustained wind speeds of over 145 mph without a storm bar, while a 10-foot width end retention shutter can withstand wind speeds of over 220 mph without a storm bar.

MaestroShield® offers the first impact-rated hood assembly on the market. Locking bottom slat available for extra security and design load.

Our connector slats attach slats to the motor tube for greater stability and added security.



Mounting

Surface Mount:

Installed flush to wall

Trapped Mount:

Installed in a restricted opening

Estimating

T.O.M. - The Online Maestro

Accurate and complete on-line estimating tool. Use anywhere there is an internet connection. T.O.M. takes the anxiety out of specifying needed parts. Just plug in your measurements and T.O.M. will itemize what you need. T.O.M. also gives you the ability to select any options or upgrades that are available with the system you have selected. T.O.M. will produce your bill of materials, and provide you with a comprehensive total cost. We designed T.O.M. to save you numerous hours of work and effort.



Quality

Our products have been rigorously tested and we've held approvals by the Miami Dade Building Code, NAMI, The Florida Building Code and the Texas department of Insurance to name a few.



Florida Building Code Approved



National Accreditation Management Institute, Inc Approved



UL Approved



Miami-Dade County Approved



Texas Depart. of Insurance Approved



Warranty

We offer competitive full-replacement and/or pass-through warranties on all of our products.

Powder Coating:

Powder Coating:
AAMA 2603 Interpon D1010
(10 year in-land and 1 year coastal*.)

Motors

Motors (non lithium battery or DC) carry a 5-year warranty.
DC motors carry a 2-year warranty
Lithium battery motors carry a 1-year warranty

Electronics

Electronics (non-solar or LED) carry a 2-year warranty.
Solar & LED carry a 1-year warranty.

**Coastal is considered within 1 mile from shoreline*

Contact Us

www.maestrosshield.com



MaestroShield Corporate Headquarters

5600 Zip Drive

Fort Myers, FL 33905 USA

Phone: +1.239.596.8883

Fax: +1.239.596.8823

Email: order@maestrosshield.com